

Gas



AQUAMAX[®]
Water Heaters

“Giving you more in
Hot Water”



AUSTRALIAN MADE FIVE STAR GAS WATER HEATERS

“5 star mains pressure Gas Storage hot water heaters provide a variety of options to suit most applications”

STAR PERFORMERS FROM AQUAMAX

Our Five Star gas storage water heaters provide a variety of options to suit most applications. Our stainless steel and vitreous enamel cylinders are backed by a 10 year (stainless steel) or 5 year (vitreous) cylinder warranty.¹

Our flagship model AquaMAX G390SS has 390 Litres available in the first hour and with 185 Litres per hour recovery,² all at mains pressure.

Eligible for government and/or industry incentives in some states.⁴



ENERGY EFFICIENT

AquaMAX Gas Water Heaters operate at over 84% thermal efficiency. As a result, AquaMAX Gas Water Heaters create less greenhouse emissions, and deliver considerable savings with reduced gas consumption over the life of the unit.³

STAINLESS STEEL CYLINDER

Constructed from stainless steel, the AquaMAX cylinder can resist corrosion for a substantially longer period than conventional cylinders. The AquaMAX stainless steel range also has no need for sacrificial anodes.



AQUAMAX G270VE

Five Star efficiency in a vitreous cylinder

A vitreous enamel water heater with 5 Star energy rating, the AquaMAX G270VE Gas Storage Water Heater offers 5 Star efficiency in a mains pressure unit.





AQUAMAX G270SS

Stainless Steel in a compact package

At last, a compact water heater with a stainless steel tank! Boasting a five star energy rating, the AquaMAX G270SS Gas Storage Water Heater offers reduced gas consumption³ utilising high efficiency gas burner technology.

AQUAMAX G340SS

Perfect hot water for new homes

The AquaMAX G340SS, five star energy rated water heater for external installation features a 155L stainless steel tank with a 10 year cylinder warranty¹ and 340 Litres first hour recovery.

Specifically designed for installation where an approved tempering valve is to be fitted to prevent scalding.









AQUAMAX G390SS

Largest delivery, in our gas range

The AquaMAX G390SS patented in-built mixing valve gives you 390 Litres first hour delivery with a five star energy rating.

The mixing valve adds a controlled mix of cold water, giving up to 205 Litres of 60°C² hot water delivery in the initial draw, with 185 Litres of recovery per hour thereafter.

As an installation option on the AquaMAX G390SS, your plumber can install twin temperature delivery. This will give you greater flexibility so you can enjoy the convenience of 65°C² hot water in the kitchen and laundry when you need it, while taking comfort in the knowledge that it is safer for kids with bathroom hot water taps at 50°C² or lower.

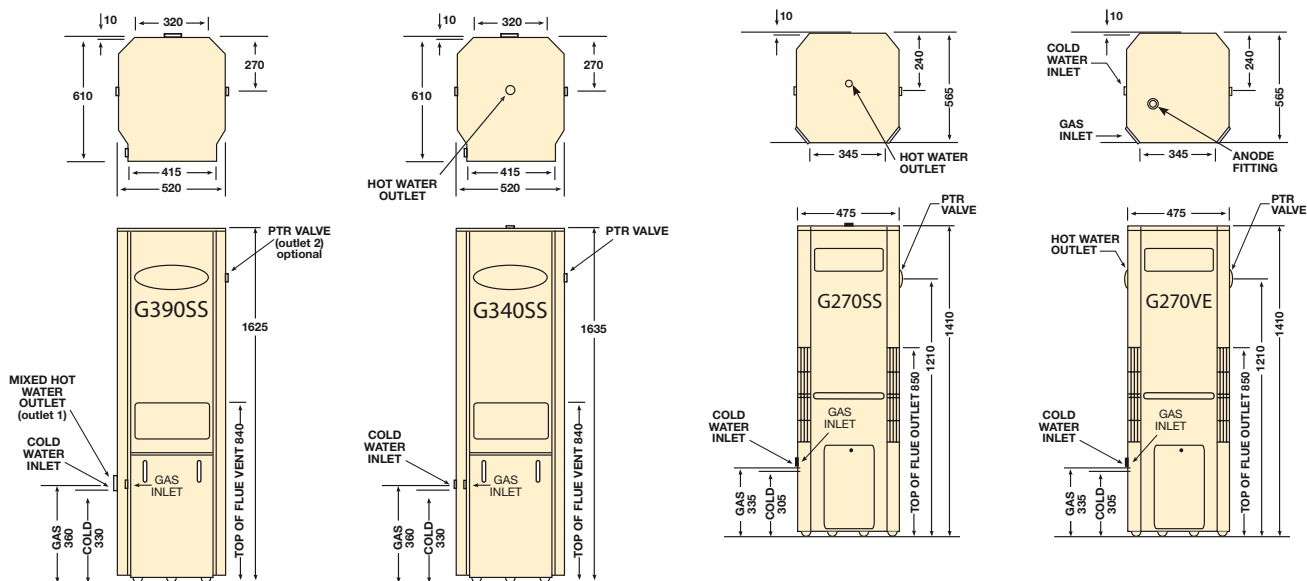
| Variable water volume Control A | Thermostat Valve Control B | Approximate delivered water temp °C | Single Draw Delivery Litres (approx.) |
|---|---|-------------------------------------|---------------------------------------|
|  |  | 50°C | 250L |
|  |  | 60°C | 205L |
|  |  | 65°C | 175L |
|  |  | 75°C | 145L |

Note: The above values are to be used as a guide only. They are based on a cold water inlet temperature of 15°C.

AQUAMAX GAS WATER HEATER SPECIFICATIONS

SPECIFICATIONS

| | G390 SS (WITH MIX) | G340 SS (WITHOUT MIX) | G270 SS | G270 VE |
|---|-------------------------------|----------------------------------|----------------------------|----------------------------|
| Number of people Served | 3-6 | 2-5 | 2-4 | 2-4 |
| Cat. No. | G390SS | G340SS | G270SS | G270VE |
| Gas type | Natural | Natural | Natural | Natural/LPG |
| Tank Capacity | 155 Litres | 155 Litres | 130 Litres | 135 Litres |
| Nominal gas consumption | 40 MJ/Hr | 40 MJ/Hr | 33 MJ/Hr | 30 MJ/Hr |
| AGA Star Rating Index | 5 Stars | 5 Stars | 5 Stars | 5 Stars |
| Recovery rate at 45°C rise | 185 Litres/Hr ² | 185 Litres/Hr ² | 145 Litres/Hr ² | 135 Litres/Hr ² |
| Installation type | External only | External only | External only | External only |
| Pressure & Temperature Relief Valve setting | 1400 kPa/99°C | 1400 kPa/99°C | 1400 kPa/99°C | 1400 kPa/99°C |
| Max. water supply pressure w/o ELV | 1120 kPa | 1120 kPa | 1120 kPa | 1120 kPa |
| Tank material | stainless steel | stainless steel | stainless steel | vitreous enamel lined |
| Water inlet connection | Rp 3/4" (20mm) Female | Rp 3/4" (20mm) Female | Rp 3/4" (20mm) Female | Rp 3/4" (20mm) Female |
| Water outlet connection | Rp 3/4" (20mm) Female | Rp 1/2" (15mm) Female | Rp 1/2" (15mm) Female | Rp 3/4" (20mm) Female |
| Gas connection | 1/2" flared compression | 1/2" flared compression | 1/2" flared compression | 1/2" flared compression |
| Warranty (Cylinder) | 10 years | 10 years | 10 years | 5 years |
| WaterMark Licence No. | WMKA00200 | WMKA00200 | WMKA00200 | WMKA00200 |
| Overall height | 1625mm | 1635mm | 1410mm | 1410mm |
| Width (approx.) | 520mm | 520mm | 475mm | 475mm |
| Depth (approx.) | 610mm | 610mm | 565mm | 565mm |
| AGA Approval No. | AGA6114G | AGA6114G | AGA7477G | AGA6705G |
| Weight empty (approx.) | 65 kg | 65 kg | 46 kg | 65 kg |



- 1 Full Warranty conditions available on request from AquaMAX Australia Pty Ltd. Call Toll Free 1800 676 000 or view at www.aquamax.com.au
- 2 Based on cold water temperature of 15°C
- 3 When compared to 3 Star and 4 Star Gas Storage Water Heaters
- 4 When converting from Electric Storage to 5 Star Gas Storage



Aquamax Australia Pty Ltd 463-467 Warrigal Road Moorabbin Vic 3189 **Toll Free: 1800 676 000**
 Ph: (03) 9532 2200 Sales Fax: (03) 9532 5244 Service Fax: (03) 9556 5534 A.B.N. 37 138 189 689
 Email: sales@aquamax.com.au For more information visit www.aquamax.com.au