









**ELECTRIC** 

DELIVERY

WARRANTY<sup>1</sup>

INSTALLATION<sup>2</sup>





## **FEATURES**

- Fast, easy like-for-like replacement
- Dual handed inlet, outlet and T&PR fittings
- All models feature smaller diameters, making for an easier fit into confined spaces
- 25L & 50L models include plug-in models
- Proven reliability
- 7 year cylinder warranty, 3 years labour on cylinder1

## WHY CHOOSE EVERHOT


- Available model range suits most applications
- Capacities to suit most family sizes and hot water requirements
- Mains pressure water delivery for water that comes on steady, hot and strong!
- Full warranty backing through a national service network





## evernot® electric dual handed - smaller capacity

MODEL		25	50	80	125
Everhot® Dual Handed Single Element		291 025 291 025/P	291 050 291 050/P	291 080	291 125
Hot Water Delivery	Litres	18	50	80	125
kW Rating	1.8		-	_	✓
	2.4	✓	✓	_	_
	3.6	✓	✓	✓	✓
Relief Valve Setting	kPa	1000	1000	1000	1000
Expansion Control Valve (kPa)	kPa	850	850	850	850
Max Water Supply Pressure:					
with ECV (kPa)	kPa	680	680	680	680
without ECV (kPa)	kPa	800	800	800	800
Water Connections		RP <sup>3</sup> / <sub>4</sub> /20	RP3/4/20	RP3/4/20	RP3/4/20
Dimensions					
Α	mm	440	695	945	1340
В	mm	370	400	480	480
С	mm	404	436	515	515
D	mm	94	397	702	1102
E	mm	165	142	64	64
F	mm	75	80	66	66
Н	degrees	29	26	24	24
J	degrees	90	59	60	60
Approx. Weight (Empty)	kg	14	29	36	49

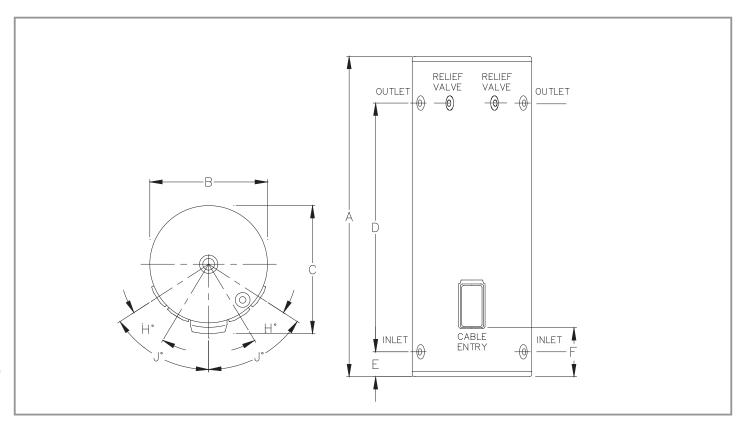



 $<sup>^{\</sup>rm 2}~$  25 and 50 litre models flex and plug models may only be used indoors





Conditions apply. See the warranty set out in the Owner's Guide & Installation Instructions

Registered Trademark of Rheem Australia Pty Ltd. Materials and data are subject to change without notice.